




REV	ECO	DESCRIPTION	DATE	BY	APP
--	3429	REF ECN SALES REQ.; INITIAL RELEASE	4/30/2010	GL	--

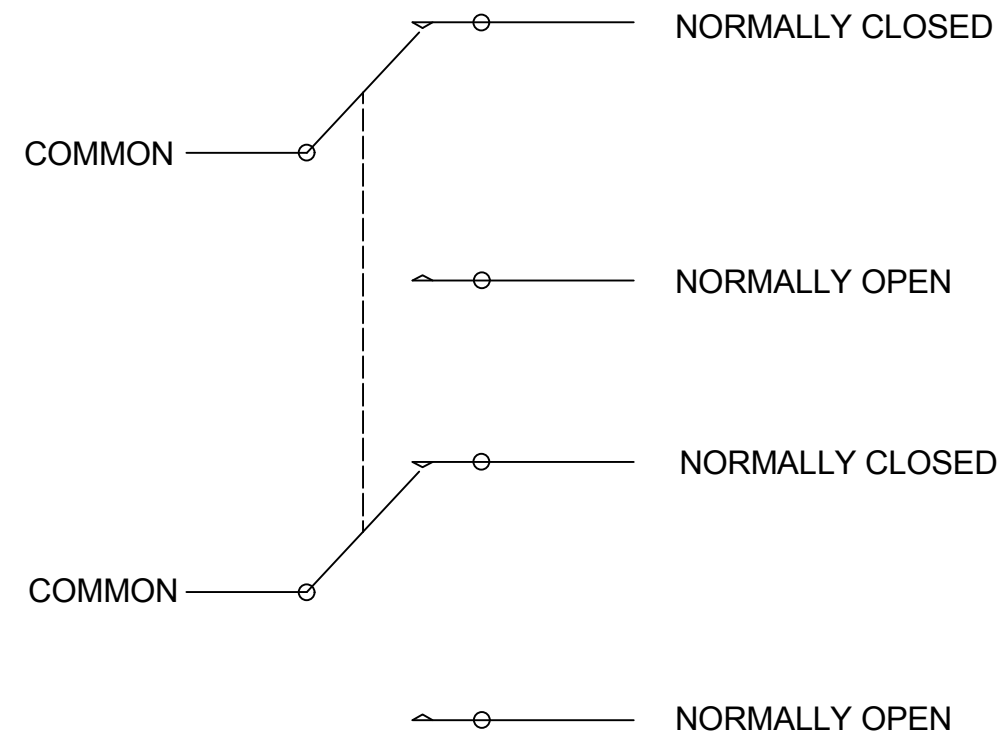


SINGLE DP/DT SWITCH
 DP/DT MICRO-SWITCH DATA:
 15 AMPS 125 OR 250 VAC
 3/4 HP 125 VAC; 1 1/2 HP 250 VAC

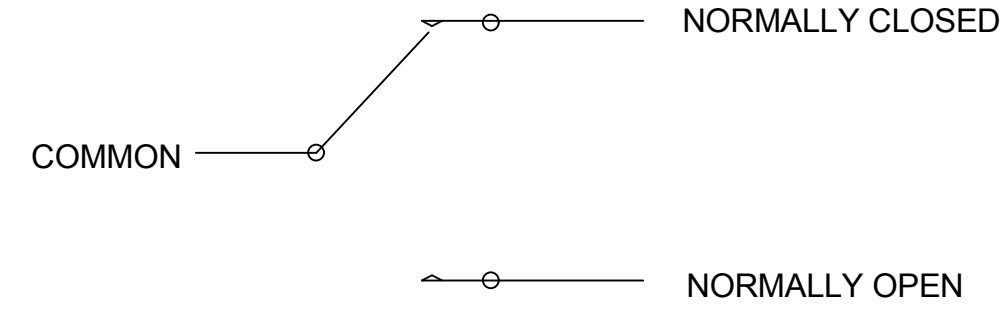

SINGLE SP/ST SWITCH
 SP/DT MICRO-SWITCH DATA:
 20 AMPS 125, 250 OR 480 VAC
 1 HP 125 VAC; 2 HP 250 VAC
 1/2 AMP, 125 VDC; 1/4 AMP, 250 VDC

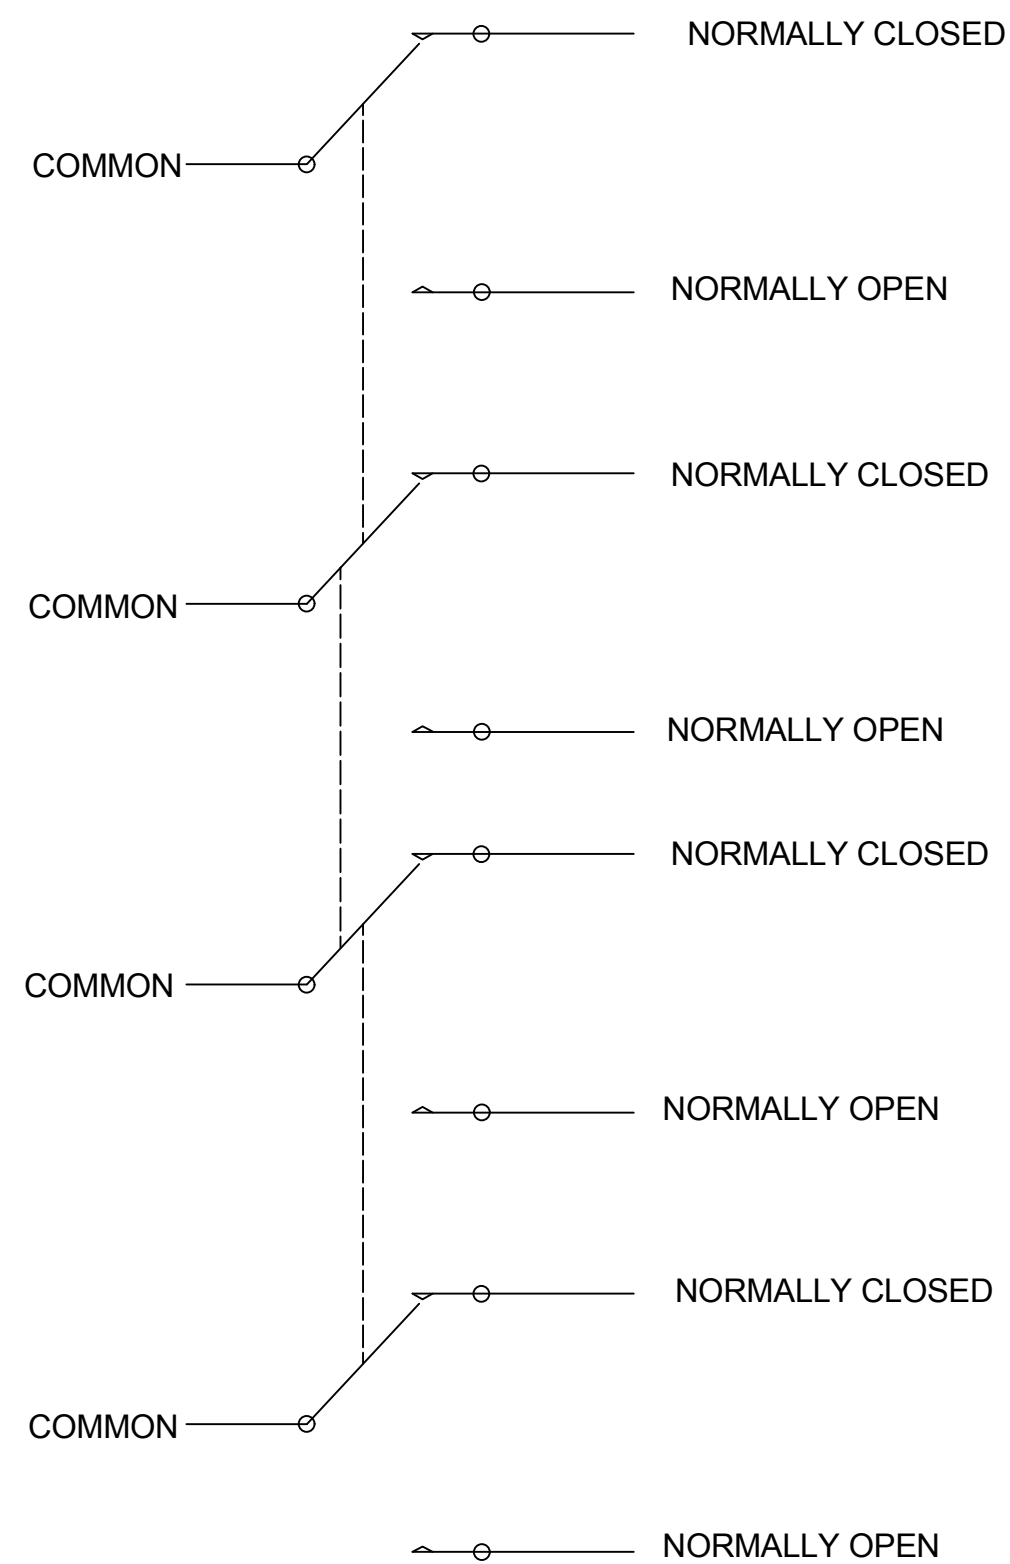


DOUBLE DP/DT SWITCHES
 DP/DT MICRO-SWITCH DATA:
 15 AMPS 125 OR 250 VAC
 3/4 HP 125 VAC; 1 1/2 HP 250 VAC

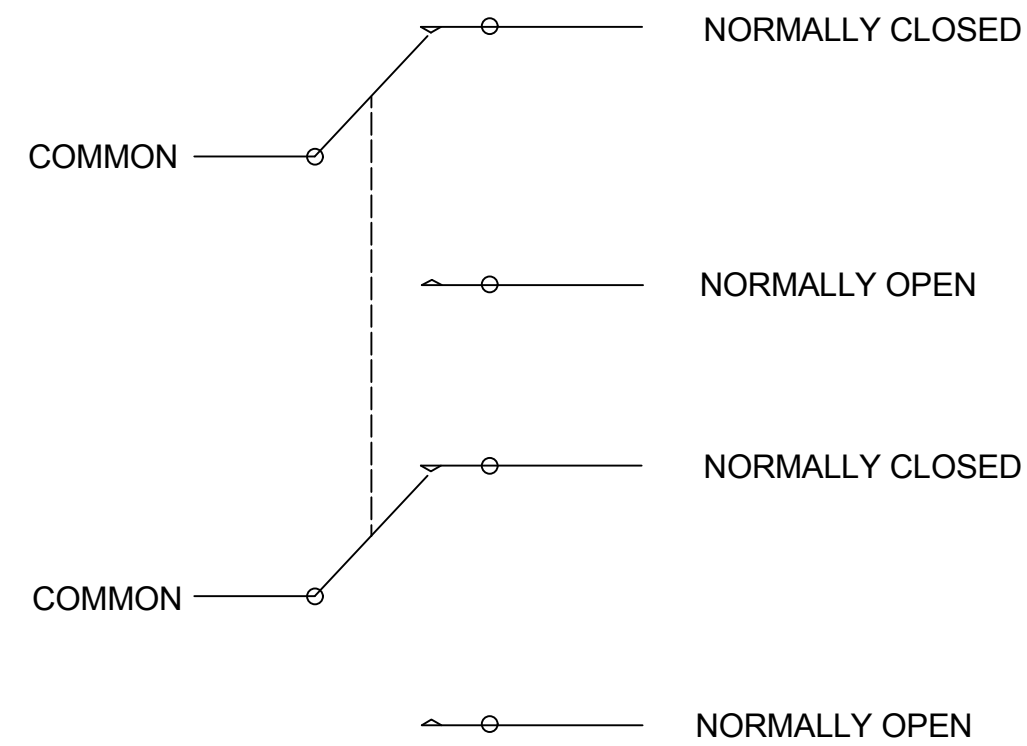

DOUBLE SP/ST SWITCHES
 SP/DT MICRO-SWITCH DATA:
 20 AMPS 125, 250 OR 480 VAC
 1 HP 125 VAC; 2 HP 250 VAC
 1/2 AMP, 125 VDC; 1/4 AMP, 250 VDC

MICRO SWITCH CONFIGURATION SHOWN AVAILABLE
 ON RS, TA, TPS AND FS MODEL SERIES.

DRAWN GL	4/30/2010	 Conveyor Components Company 130 Seltzer Road Crosswell, Michigan, U.S.A., 48422
CHECKED --		
APPROVED JK	5/3/2010	TITLE
PART D1030021		ELECTRICAL CONTACT DATA FOR SELECT MODEL GROUPS
THIS PRINT IS PROPERTY OF CONVEYOR COMPONENTS CO., AND MAY NOT BE USED IN WHOLE OR PART WITHOUT WRITTEN PERMISSION.		Drawing is computer generated, and print might not be to scale
SIZE C	DWG NO D1030021.dwg	REV --
SCALE	SHEET 1 OF 1	